

SANS 952-2016 TYPE B

EASY FICHA TÉCNICA




## DAMP-PROOF COURSE

**DPC Black® 375 micron** dampproof course is best utilised in preventing rising damp in walls. It prevents efflorescence and flaking of the wall covering. It will not absorb water and is chemically inert. Flexibility is retained between -45 and 78 degrees Celsius and the material does not extrude under pressure. Tear and puncture resistance are excellent.



## SPECIFICATION

The damp-proof course shall consist of DPC Black® 375 with well lapped at joints and intersections and bedded and joined in cement mortar.

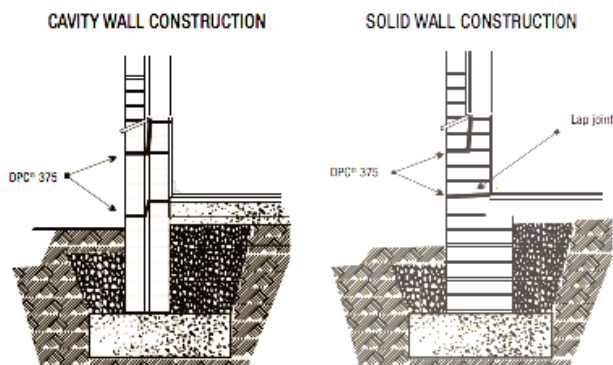

DPC Black® 375						
CERTIFICATION	SABS 952-2016 Type B for use as a damp proof course					
MATERIAL	Low-density Polyethylene					
FORM	Roll					
APPEARANCE	Black in colour					
THICKNESS	375 microns minimum					
ROLL LENGTH	40m					
ROLL WIDTH	110mm	150mm	225mm	300mm	340mm	450mm
ROLL WEIGHT	1.7kg	2.3kg	3.4kg	4.6kg	5.2kg	6.8kg
COMPLIES WITH	NRCS, NHBRC and the National Building Regulations					